

# MENZIES BLUE DRAIN SEAL™

## INSTALLATION INSTRUCTIONS



**STEP 1:** Insert **Blue Drain Seal** into the bottom of the drain.

**STEP 2:** Using the “Menzies Blue Drain Seal Screwdriver”, evenly tighten screws to expand the seal inside the pipe, just enough to hold the **Blue Drain Seal** securely in place.

**STEP 3:** Insert the drain (with **Blue Drain Seal** safely attached), making sure the drain is inserted into the plumbing drainpipe.

Using the “Menzies Blue Drain Seal Screwdriver”, tighten the screws three (3) full turns in rotation until the screws are tight. **DO NOT OVER-TIGHTEN.**


Two expansion seals are formed when the screws are tightened; one against the insert drain, the other against the existing drain, creating two positive water enclosures. No water can back up and spread under the insulation and roof.



①



②

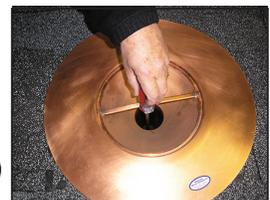

③

## WARNINGS

**WARNING A:** Do not use an electric drill - even tightening cannot be achieved.


**WARNING B:** If the drainpipe is shortened, cut the pipe squarely. Pipes that are not cut squarely can result in improper tightening of the seal.



Ⓐ



Ⓑ

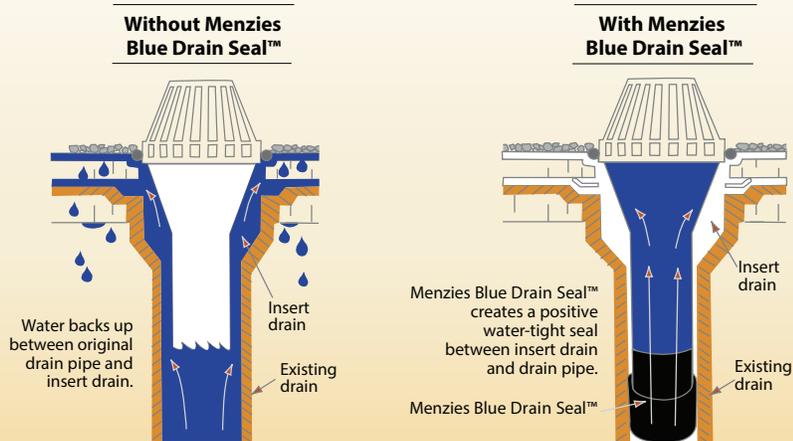

For our full product line,  
contact:



*More Than Just Metal*

**1.800.665.8840**  
sales@menzies-metal.com  
www.menzies-metal.com